



# NetCoating® Plus



## PRODUCT DATA SHEET



Biocide-free

### Next Generation NetCoating - Healthy fish in clean nets

NetCoating® Plus by Steen-Hansen is a biocide free and water based coating for use on aquaculture nets. It is designed for aquaculture farms which are running in-situ cleaning regimes to maintain their nets. NetCoating® Plus withstands gentle in-situ cleaning, and will keep the net changing operational cost to a minimum. NetCoating® Plus is also designed for organic operated fish farms.



- No Biocides
- Withstands gentle cleaning (>100Bar)
- Reduced operational costs
- Less environmental footprint
- Also for Organic farming



**Steen-Hansen**

Steen-Hansen AS  
Ulsmågveien 24  
NO-5224 Nesttun  
Norway

Vat.no: NO 982 775 337 MVA  
Phone: +47 55 11 62 60  
E-mail: [post@steen-hansen.no](mailto:post@steen-hansen.no)  
Web: [www.steen-hansen.com](http://www.steen-hansen.com)

## Quality specifications


Quality	Target	Tolerance
Specific weight	1,02 g/ml (Ocher 1,03)	1,01—1,04 g/ml
Dilution	1:1 v/v	
Colour	Black/Ocher	
Active substances	None	
Viscosity	13 sec/100ml (DIN4)	12 — 14 sec/100ml (DIN4)
Storage temperature	>5°C	5— 30°C
Storage time	6 months	

## Applied on net\*

Quality	Expected	Reference product
Sinking speed in seawater	50 — 60 seconds	11,5 seconds
Uptake	0,6 — 0,9 l/kilo net	1,2 l/kilo net
Drying time	12-24 hrs	12-24 hrs
Curing time	4 days	2 days
Stiffness	Medium	Soft
In-situ cleaning resistance	High	Low
Net elasticity	50,6 ± 0,98 mm	50mm
Net breaking strength	1645,9 ± 48,4N	1325N
Weight in seawater	TBA	

\* Applied on net values are measured results in controlled conditions to be used as reference only. Real life variations such as application method, drying time, curing time, net type, temperature etc will produce different results.

Reference product, comparable measurements made on: Nylon with AquaNet Ultra

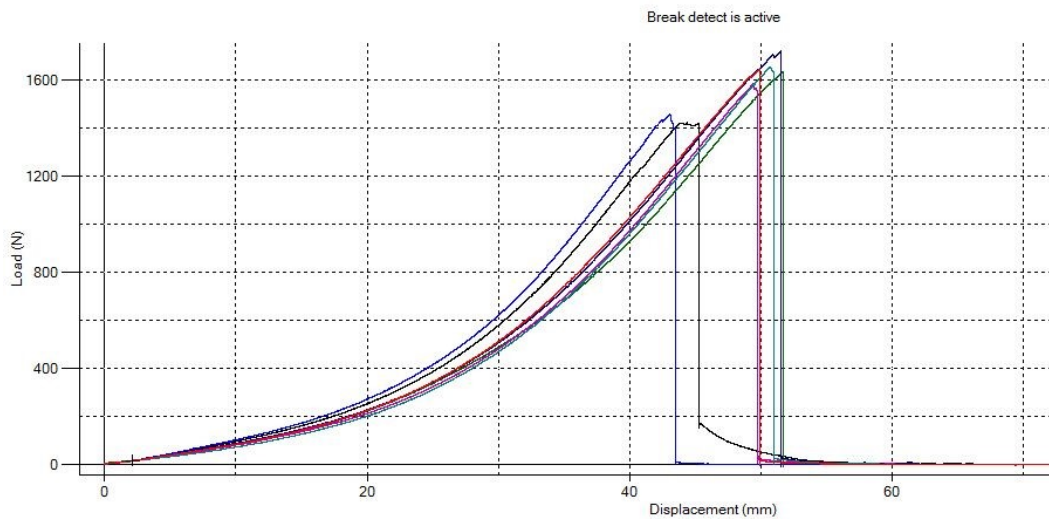

Graph, elasticity and breakage strength — = non-treated net sample

